

INTEROBIZ

www.interobiz.ro



Construction

Close coupled multi-stage submersible pumps in **chrome-nickel stainless steel**.

Hydraulic part under the motor and motor cooled by the pumped water for safe operation also with the pump only partially immersed. Double shaft seal with interposed oil chamber.

The suction strainer prevents the entrance of solids with diameter bigger than: - 2,5 mm for MXS 203,4,5,6 - 404,5 - 803,4
- 2 mm for MXS 207,8,9,10 - 406,7,8,9,10 - 805,6,7,8,9.

Applications

For water supply from wells, tanks or reservoirs.

For domestic use, for civil and industrial applications, for garden use and irrigation. Utilization of rain water.

Operating conditions

Water temperature up to 35 °C.

Minimum internal diameter of well: 132 mm.

Minimum immersion depth: 100 mm.

Maximum immersion depth: 20 m (with suitable cable length).

Continuous duty.

Motor

2-pole induction motor, 50 Hz.

MXS : three-phase 230 V ± 10%;
three-phase 400 V ± 10%.

MXSM : single-phase 230 V ± 10%, with thermal protector up to 1,1 kW.
**Control box with capacitor (and thermal device for 1,5 kW).
Float switch (on demand)**

Cable: H07RN8-F, 4 G 1 mm², length 15 m.

Insulation class F.

Protection IP 68 (for continuous immersion).

Double impregnation humidity-proof dry winding.

Constructed in accordance with EN 60335-2-41.

Special features on request

- Other voltages.

- Frequency 60 Hz (as per 60 Hz data sheet).

- Cable length 20 m.


Materials

| Component | Material |
|------------------------------------|--|
| Delivery casing* | Chrome-nickel steel 1.4301 EN 10088 (AISI 304) Nickel-plated Brass UNI-EN 12165-98** |
| External jacket - Suction strainer | Chrome-nickel steel 1.4301 EN 10088 (AISI 304) |
| Stage casing - Impeller | Chrome-nickel steel 1.4301 EN 10088 (AISI 304) |
| Oil chamber cover | Chrome-nickel steel 1.4301 EN 10088 (AISI 304) |
| Spacer sleeve - Motor jacket | Chrome-nickel steel 1.4301 EN 10088 (AISI 304) |
| Shaft | Chrome-nickel steel 1.4305 EN 10088 (AISI 303) Cr-Ni steel 1.4301 EN 10088 (AISI 304)** |
| Motor shield | Brass P- Cu Zn 40 Pb 2 UNI 5705 Cr-Ni steel 1.4301 EN 10088 (AISI 304)** |
| Upper mechanical seal | Steatite, carbon, NBR |
| Lower mechanical seal | Ceramic alumina, silicon carbide, NBR Silicon carbide, Silicon carbide, NBR** |
| Seal lubrication oil | Oil for food machinery and pharmaceutical use |

* Delivery casing and external jacket as one piece only for MXS 203,204,205,206,404,405,803,804

** per MXS 207,208,209,210 - 406,407,408,409,410 - 805,806,807,808,809

Coverage chart $n \approx 2900$ rpm

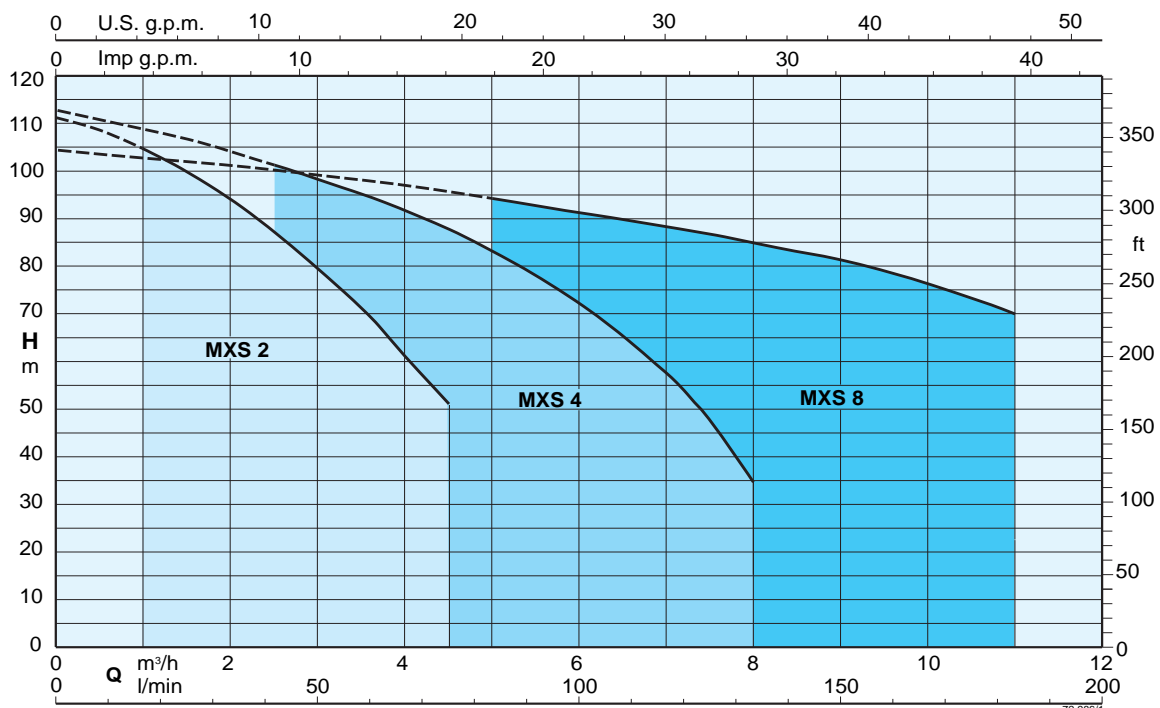

Performance $n \approx 2900$ rpm


| 3 ~ | 230 V | | 400 V | 1 ~ | 230 V | | Capacitor | | P1 | P2 | | Q | m ³ /h | | | | | | | | |
|----------------|-------|------|-----------------|-----|-------|-----|-----------|------|------|-----|-----|------|-------------------|------|------|------|------|------|------|-----|---|
| | A | A | | | A | μF | V | kW | | kW | HP | | l/min | 0 | 1 | 1,5 | 2 | 2,5 | 3 | 3,5 | 4 |
| MXS 203 | 2,4 | 1,4 | MXSM 203 | 3,5 | 20 | 450 | 0,8 | 0,55 | 0,75 | H m | 33 | 31 | 29,5 | 27,5 | 25 | 22 | 19 | 16 | 12 | | |
| MXS 204 | 2,7 | 1,6 | MXSM 204 | 4,1 | 20 | 450 | 0,85 | 0,55 | 0,75 | | 44 | 41,5 | 39,5 | 36,5 | 33,5 | 29,5 | 25,5 | 21 | 16 | | |
| MXS 205 | 3,3 | 1,9 | MXSM 205 | 5 | 20 | 450 | 1,1 | 0,75 | 1 | | 53 | 49,5 | 47 | 44 | 40 | 35 | 30 | 25 | 19 | | |
| MXS 206 | 3,8 | 2,2 | MXSM 206 | 6 | 25 | 450 | 1,3 | 0,9 | 1,2 | | 65 | 61 | 58 | 54 | 49 | 43 | 37 | 30,5 | 23 | | |
| MXS 207 | 4,3 | 2,45 | MXSM 207 | 6,6 | 30 | 450 | 1,35 | 0,9 | 1,2 | | 78 | 73,3 | 70 | 65,8 | 61,3 | 55,3 | 50 | 42,5 | 35,8 | | |
| MXS 208 | 4,7 | 2,7 | MXSM 208 | 7,2 | 30 | 450 | 1,55 | 1,1 | 1,5 | | 89 | 83,8 | 80 | 75 | 70 | 63 | 57,1 | 48,8 | 40,8 | | |
| MXS 209 | 5,2 | 3 | MXSM 209 | 9 | 35 | 450 | 1,8 | 1,5 | 2 | | 100 | 94,4 | 90 | 85 | 78,7 | 71 | 65,2 | 55 | 46,3 | | |
| MXS 210 | 5,7 | 3,3 | MXSM 210 | 9,7 | 35 | 450 | 2 | 1,5 | 2 | | 111 | 105 | 100 | 94,2 | 87,5 | 79 | 71,3 | 61,3 | 51,3 | | |

| 3 ~ | 230 V | | 400 V | 1 ~ | 230 V | | Capacitor | | P1 | P2 | | Q | m ³ /h | | | | | | | | |
|----------------|-------|-----|-----------------|------|-------|-----|-----------|-----|-----|-----|------|-----|-------------------|------|------|------|------|------|------|------|---|
| | A | A | | | A | μF | V | kW | | kW | HP | | l/min | 0 | 2,5 | 3 | 3,5 | 4 | 4,5 | 5 | 6 |
| MXS 404 | 3,8 | 2,2 | MXSM 404 | 6 | 25 | 450 | 1,3 | 0,9 | 1,2 | H m | 43 | 39 | 38 | 36,5 | 34,5 | 33 | 30,5 | 25,5 | 19,5 | 13 | |
| MXS 405 | 4,5 | 2,6 | MXSM 405 | 7 | 25 | 450 | 1,55 | 1,1 | 1,5 | | 53 | 48 | 46,5 | 45 | 42,5 | 40 | 37,5 | 31 | 24 | 15 | |
| MXS 406 | 4,8 | 2,8 | MXSM 406 | 7,6 | 30 | 450 | 1,65 | 1,1 | 1,5 | | 67,5 | 61 | 58,8 | 57 | 55 | 53 | 50 | 43,5 | 34,5 | 20,5 | |
| MXS 407 | 5,7 | 3,3 | MXSM 407 | 9,5 | 35 | 450 | 1,95 | 1,5 | 2 | | 78,8 | 71 | 69 | 66,5 | 64 | 61,5 | 58 | 50,5 | 40 | 24 | |
| MXS 408 | 6,1 | 3,5 | MXSM 408 | 10,5 | 35 | 450 | 2,2 | 1,5 | 2 | | 90,3 | 81 | 79 | 76 | 73,5 | 70,5 | 66,5 | 57,5 | 46 | 27,5 | |
| MXS 409 | 8,3 | 4,8 | | | | | | | 3 | | 101 | 91 | 88,5 | 85,5 | 82,5 | 79 | 75 | 65 | 52 | 31 | |
| MXS 410 | 8,9 | 5,1 | | | | | | | 3 | | 113 | 101 | 98,5 | 95 | 92 | 88 | 83 | 72,5 | 57,5 | 34,5 | |

| 3 ~ | 230 V | | 400 V | 1 ~ | 230 V | | Capacitor | | P1 | P2 | | Q | m ³ /h | | | | | | | | |
|----------------|-------|-----|-----------------|-----|-------|-----|-----------|-----|-----|-----|------|------|-------------------|------|------|------|------|------|------|----|----|
| | A | A | | | A | μF | V | kW | | kW | HP | | l/min | 0 | 5 | 6 | 7 | 8 | 9 | 10 | 11 |
| MXS 803 | 4,5 | 2,6 | MXSM 803 | 7 | 25 | 450 | 1,55 | 1,1 | 1,5 | H m | 34,5 | 29,5 | 28 | 26,5 | 24,5 | 22,5 | 20 | 16,5 | | | |
| MXS 804 | 6,6 | 3,8 | | | | | | | 1,5 | | 2 | 45,5 | 39 | 37 | 35 | 32,5 | 30 | 26,5 | 22,5 | | |
| MXS 805 | 8,5 | 4,9 | | | | | | | 2,2 | | 3 | 58 | 52,5 | 50,8 | 49,2 | 47,2 | 45 | 42,5 | 38,8 | | |
| MXS 806 | 9 | 5,2 | | | | | | | 2,2 | | 3 | 70 | 63 | 61,2 | 58,8 | 56,7 | 54,4 | 51,2 | 46,7 | | |
| MXS 807 | 10,8 | 6,2 | | | | | | | 3 | | 4 | 81,3 | 73,7 | 71,3 | 68,8 | 66,3 | 63,7 | 59,5 | 54,5 | | |
| MXS 808 | 11,6 | 6,7 | | | | | | | 3 | | 4 | 93 | 83,8 | 81,3 | 78,8 | 75,6 | 72,5 | 67,9 | 62,5 | | |
| MXS 809 | 12,7 | 7,3 | | | | | | | 3 | | 4 | 105 | 94,6 | 91,3 | 88,7 | 85 | 81,3 | 76,3 | 70 | | |

P1 Max. power input. P2 Rated motor power output. Tolerances according to ISO 9906, annex A. Test results with clean cold water, without gas content.

Dimensions and weights

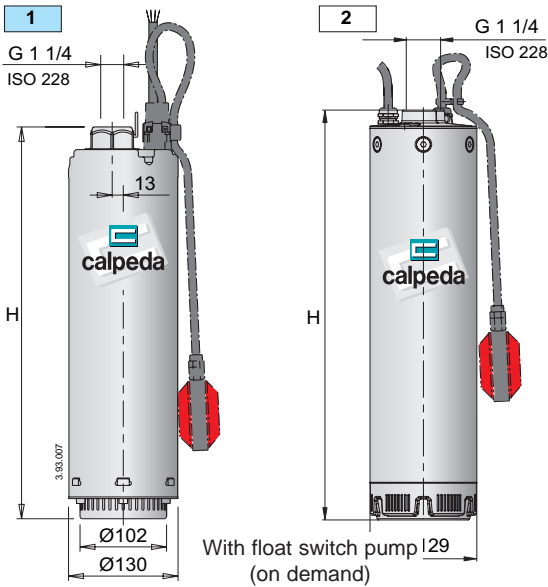


Weights with cable length: 15 m




| Picture | Pump | H mm | kg | | |
|---------|---|------|------|------|---------|
| | | | MXS | MXSM | MXSM.CG |
| 1 | MXS 203 - MXSM 203 - MXSM 203 CG | 448 | 12,9 | 13,9 | 14,2 |
| | MXS 204 - MXSM 204 - MXSM 204 CG | 448 | 13,1 | 14,1 | 14,4 |
| | MXS 205 - MXSM 205 - MXSM 205 CG | 472 | 13,6 | 15,2 | 15,5 |
| | MXS 206 - MXSM 206 - MXSM 206 CG | 496 | 14,9 | 16,4 | 16,7 |
| 2 | MXS 207 - MXSM 207 - MXSM 207 CG | 552 | 19 | 20 | 20,3 |
| | MXS 208 - MXSM 208 - MXSM 208 CG | 576 | 19,5 | 20,5 | 20,8 |
| | MXS 209 - MXSM 209 - MXSM 209 CG | 650 | 21,5 | 23,5 | 23,8 |
| | MXS 210 - MXSM 210 - MXSM 210 CG | 674 | 22 | 24 | 24,3 |
| 1 | MXS 404 - MXSM 404 - MXSM 404 CG | 448 | 14 | 15,6 | 15,9 |
| | MXS 405 - MXSM 405 - MXSM 405 CG | 472 | 14,5 | 16 | 16,3 |
| 2 | MXS 406 - MXSM 406 - MXSM 406 CG | 528 | 18,5 | 19,5 | 19,8 |
| | MXS 407 - MXSM 407 - MXSM 407 CG | 602 | 20,5 | 22,5 | 22,8 |
| | MXS 408 - MXSM 408 - MXSM 408 CG | 626 | 21 | 23 | 23,3 |
| | MXS 409 | 650 | 23,5 | | |
| | MXS 410 | 674 | 24 | | |
| | MXS 803 - MXSM 803 - MXSM 803 CG | 472 | 14,1 | 15,7 | 16 |
| 2 | MXS 804 | 472 | 16,3 | | |
| | MXS 805 | 614 | 22 | | |
| | MXS 806 | 644 | 22,5 | | |
| | MXS 807 | 674 | 24,5 | | |
| | MXS 808 | 704 | 25 | | |
| | MXS 809 | 734 | 25,5 | | |

Control box for single-phase pumps

| Pump | Control box | Capacitor | |
|--|--------------|-----------|-------|
| MXSM 203 - MXSM 203 CG MXSM 204 - MXSM 204 CG MXSM 205 - MXSM 205 CG | QM 11 | 20 μF | 450 V |
| MXSM 206 - MXSM 206 CG MXSM 404 - MXSM 404 CG MXSM 405 - MXSM 405 CG MXSM 803 - MXSM 803 CG | QM 12 | 25 μF | 450 V |
| MXSM 207 - MXSM 207 CG MXSM 208 - MXSM 208 CG MXSM 406 - MXSM 406 CG | QM 13 | 30 μF | 450 V |
| MXSM 209 - MXSM 209 CG MXSM 210 - MXSM 210 CG MXSM 407 - MXSM 407 CG MXSM 408 - MXSM 408 CG | QM 14 | 35 μF | 450 V |



Characteristic curves $n \approx 2900$ rpm

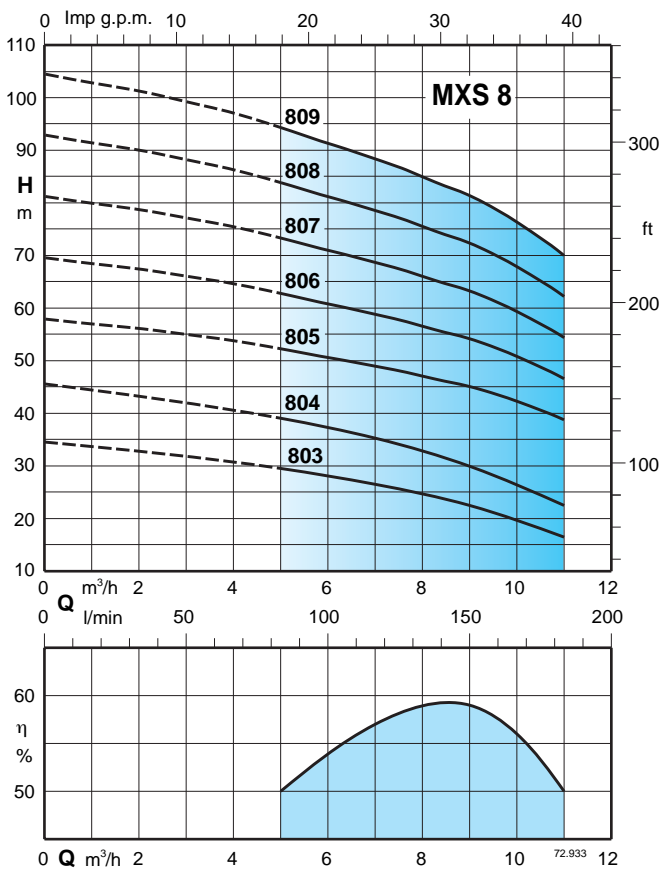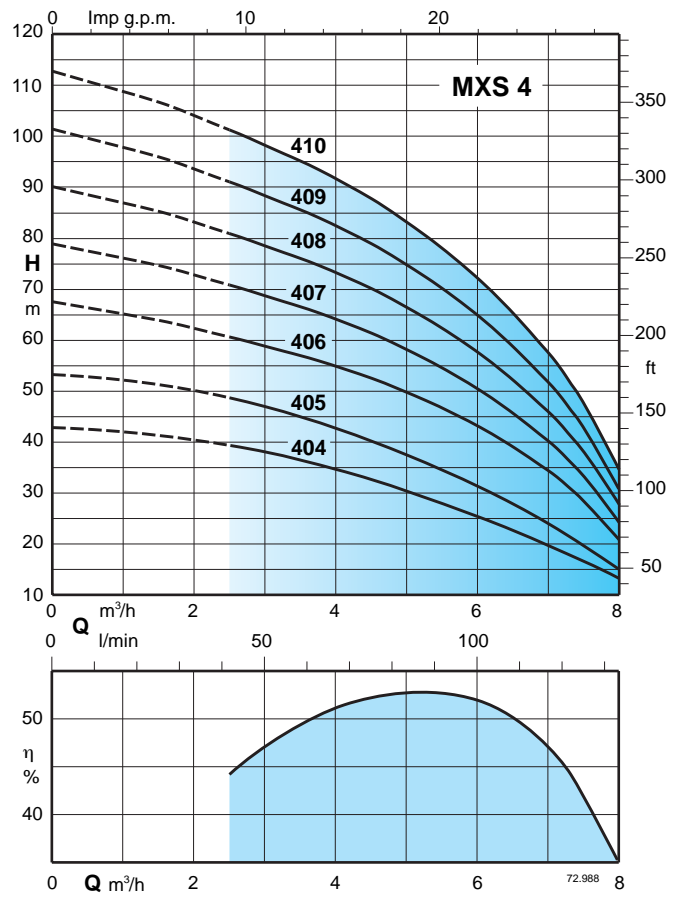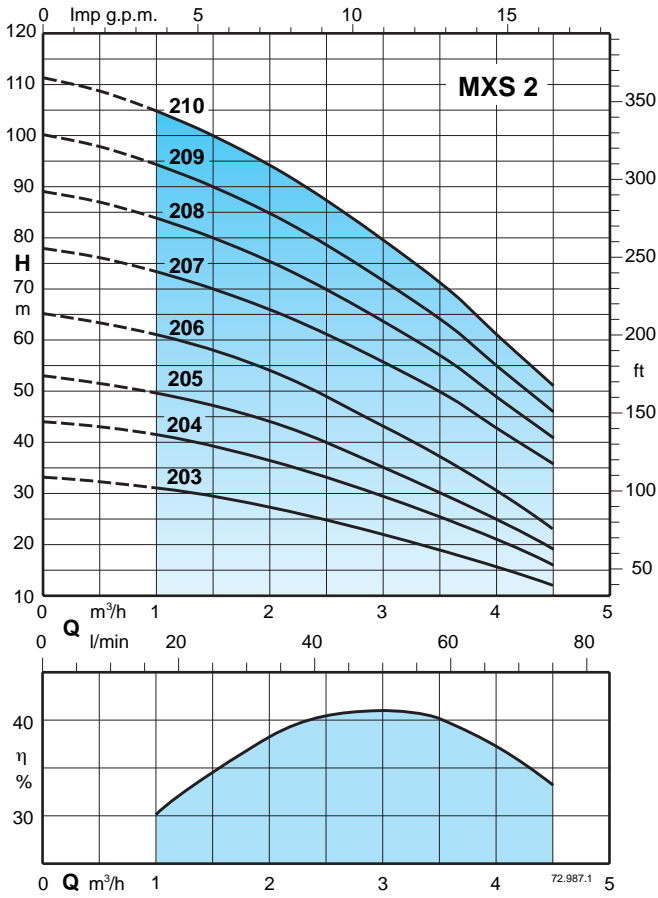

Features

■ Low Cost Installation

Immersed without suction pipe and valves. The cylindrical suction strainer, with smaller diameter with respect to the pump, allows for obstacle-free suction also from wells with the minimum diameter of 132 mm or, with its robust stainless steel construction, for supporting the pump when positioned on the flat surface of a tank for operation with the minimum water level of 100 mm.

■ Low-Noise Operation


The design of hydraulic parts, the water-filled shroud around the motor and the submersed pump allow for low-noise operation.

■ Reliable and Environment Friendly


With hydraulic parts in cold-pressed drawn stainless steel. The only pump of its kind with no components in plastic material.

■ Greater Safety


With submersed pumps protected against dry running and the danger of freezing. No filling operations at start-up and no suction problems. The double shaft sealing with an interposed oil chamber separates the motor from the water and provides further protection against accidental operation when dry.

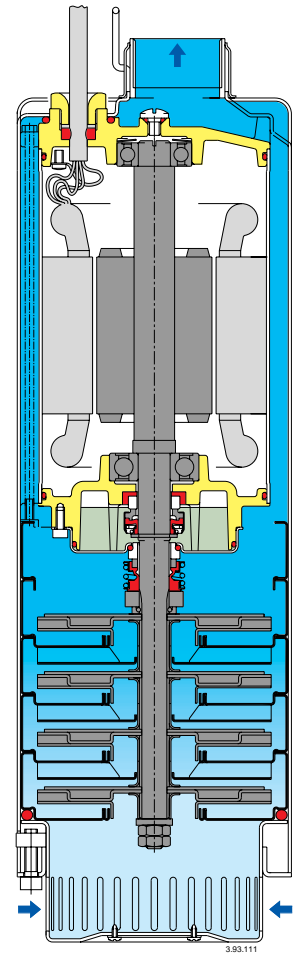


Installation

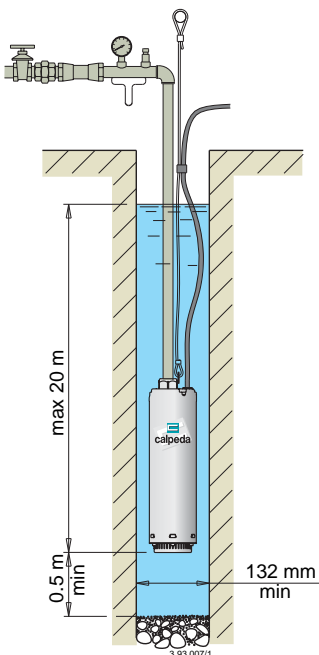

Pump in suspended position

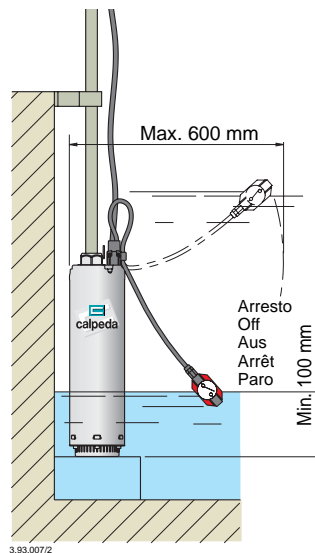

Pump with float switch (on demand)

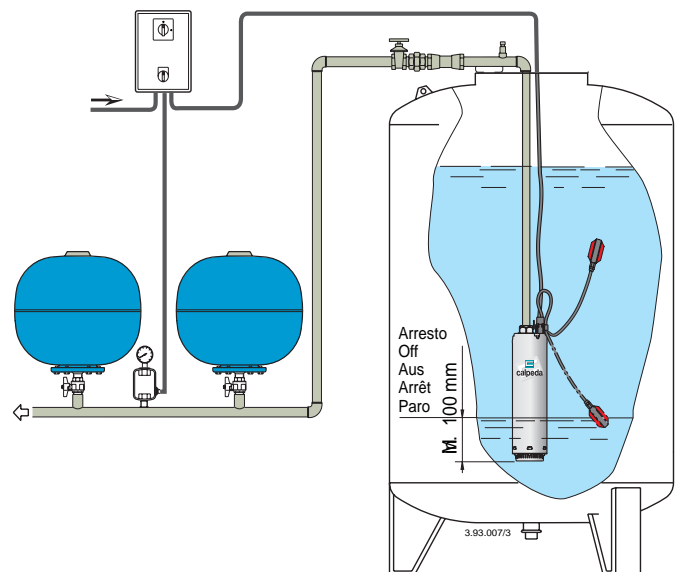

Installation example